

APC Sentry II Thermocouples with Thermo-Guards have one coat of refractory-saturated white glass and two coats of refractory-saturated, tight-weave fiberglass over 11/16" tubing with silicon carbide tips.

# Advance<sup>®</sup> consumables

## Thermocouples

**APC Sentry II Thermocouples with Thermo-Guards have:**

One coat of refractory saturated white glass and two coats of refractory saturated, tight-weave fiberglass over 11/16" tubing with silicon carbide tips.


**Thermo-Guards protect the Thermocouples.**

**Advantages Include:**

**Longer Life** - The refractory surface of the *Thermo-Guard* resists erosion by molten aluminum up to temperatures of 1400°F. No additional coatings are required to prolong useful life.

**Savings On Man-Hours and Materials** - Longer tube life means longer thermocouple life and less man-hours for maintenance.

Standard features include 3/4" NPT, 20 gauge Type K wire, and three foot leads.

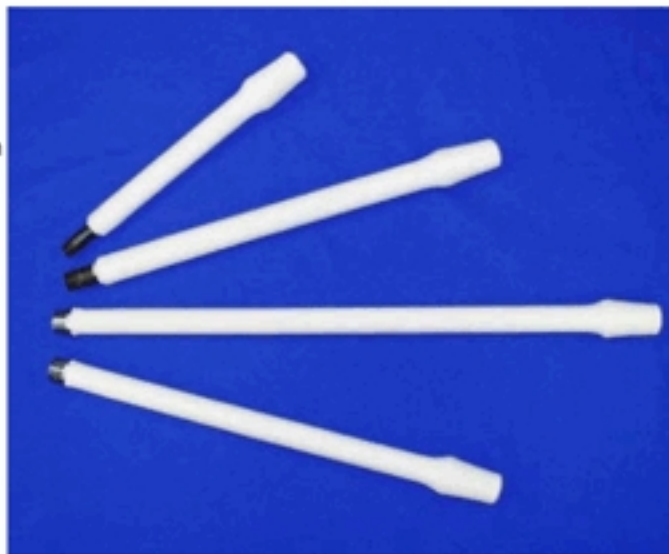

Length	12"	18"	24"	30"	36"	42"	48"
APC Sentry II w/Thermocouple	#8924- 12	#8924- 18	#8924- 24	#8924- 30	#8924- 36	#8924- 42	#8924- 48

Your "Window to the World"<sup>™</sup> of Die Casting Automation and Consumable Products

# Advance

Advance Products Corporation - 2527 M-63 Benton Harbor, Michigan 49022  
Phone (269) 849-1000 - Fax (269) 849-2200 - [www.advanceproductscorp.com](http://www.advanceproductscorp.com)

©Advance Products  
Corporation  
Printed in U.S.A.  
APC-100-0002